


Energy Management

Modular DC Energy analyzer

Type VMU-E and VMU-X

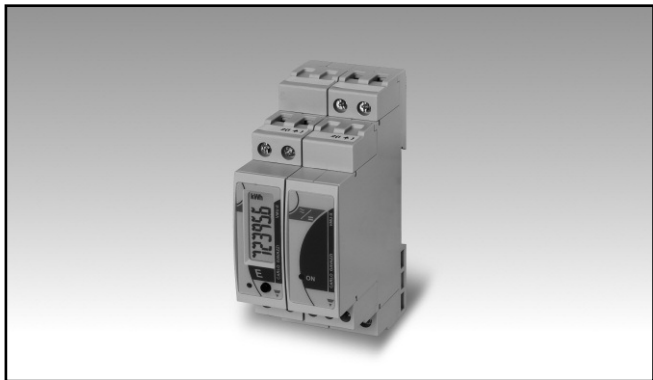

- Modular solution based on the combination of two units: VMU-E analysis unit and VMU-X universal power supply and RS485 communication unit.

VMU-E, DC energy analysis unit



- Instantaneous variables: V, A, W
- Instantaneous variables data format: 4-DGTs
- Energy measurements: kWh
- Energies data format: 6 DGT
- Accuracy: class 1 (kWh), ± 0.5 RDG (current/voltage)
- Direct DC current measurement up to 20A
- External shunt DC current measurement up to 1000A
- Direct DC voltage measurement up to 400V
- Auxiliary power supply from VMU-X unit
- Dimensions: 1-DIN module
- Protection degree (front): IP40

VMU-E Product Description

DC energy analyzer unit with built-in 6 digit display and programming push-button, particularly indicated for DC current, voltage, power and energy metering. Direct connection up to 20A and with external shunt up to 1000A. Moreover the unit is provided with an auxiliary serial communication bus which is connected to the VMU-X unit so to provide an RS485 communication port. Housing for DIN-rail mounting, IP40 (front) protection degree.

How to order

VMU-E

AV00

XX

X

X

Model

Range code

Power supply

Internal bus

Option


Type Selection

Range code	Power supply	Internal bus	Option
AV00: 400V DC - 20A (Direct connection) or external shunt input for currents up 1000A (*)	XX: self-power supply from VMU-X unit	X: internal bus compatible only to VMU-X module (*)	X: none

(*) as standard.



VMU-X, universal power supply and RS485 communication unit or static digital output

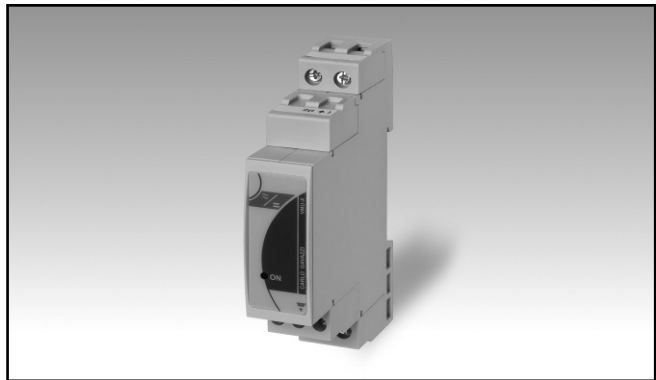


- Power supply module for VMU-E unit
- RS485 communication port (Modbus)
- One digital output for pulse retransmission proportional to the energy being measured or for alarm control
- 38 to 265 VAC/DC power supply input
- Dimensions: 1-DIN module
- Protection degree (front): IP40

VMU-X Product Description

Universal power supply module suitable to be used in combination to VMU-E unit. In order to improve the communication capability of VMU-E unit, VMU-X can be provided with either an RS485 communication port or with a static output. Housing for DIN-rail mounting, IP40 (front) protection degree.

How to order

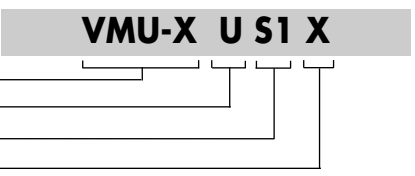

Type Selection

Power supply	Communication	Option	(*) as standard.
U: from 38 to 265VAC/DC (*)	S1: RS485 Modbus (*) D1: static digital output for pulse retransmission or alarm control (*)	X: none	

VMU-E Display and LED specifications

Display	1 line (max: 6-DGT)	priority on any other condition: energy consumption or communication). Green blinking light: the communication on the RS485 bus is working. Note: in case of energy counting or communication condition, the LED alternates its colour from red to green.
Type	LCD, h 7mm	
Information read-out	From 4 to 6-DGT depending on the information.	
LED		
Type	Dual colour	
Status and colour	Red blinking light: energy consumption; 1000 pulses/kWh (Max Frequency 16 Hz). Red steady light: alarm detected (it has the	

VMU-X LED specification

LED			
Type	Single colour	Colour	Green: the power supply is ON.

VMU-E input specifications

Rated inputs		Max. and Min. indication	See "VMU-E set of variables"
Current input	1 (internal shunt)		
Current direct conn. range	From 0 to 20A DC		
Current external shunt conn. range	From 0 to 120mV DC	Input impedance	
Voltage range	From 0 to 400V DC	Voltage	= 5MΩ
		Current direct connection	< 0.006Ω+ @ 0.5 Nm (screw terminal torque).
		Current external shunt conn.	> 30kΩ
Accuracy	(@25°C ±5°C, R.H. ≤60%)	Voltage Overloads	
Current direct conn. range	±(0.5%RDG+2 DGT) from 0.05A to 20A DC	Continuous	500V
Start up current	50mA DC	For 1s	800V
Current external shunt conn.	±(0.5%RDG+2 DGT) from 0.1mV to 120mV DC	Current Overloads	
Start up current	0.1mV DC	Direct connection	
Voltage	±(0.5%RDG+2 DGT) from 1V to 400V DC	Continuous	20A DC
Start up voltage	10V DC	For 1s	100A DC max
Power	±(1% RDG+ 2DGT)	External shunt connection	
Energy	±(1% RDG)	Continuous	10V DC
		For 1s	20V DC max
Temperature drift	≤200ppm/°C		
Measurement sampling time	≤150 sec		
Key-pad	1 push-button for variable scrolling and programming of the instrument working parameters.		
Display read-out			
Instantaneous variables	4-DGT (V, A, W)		
Resolution	0.1V; 0.01A; 0.01kW (for more details see "VMU-E set of variables")		
Energy	Total: 6-DGT (0.1KWh)		

VMU-X Output specifications

RS485	Type	Multidrop, bidirectional (static and dynamic variables)	Type	Static: opto-mosfet;
	Connections	2-wire. Max. distance 1000m	Load	V_{ON} 2.5 VAC/DC max. 70 mA,
	Addresses	247, selectable by means of the front push-button	Pulse output	V_{OFF} 260 VAC/DC max.
	Protocol	MODBUS/JBUS (RTU)	Pulse duration	$\geq 100\text{ms} < 120\text{msec}$ (ON),
	Data (bidirectional)		Alarm output	$\geq 120\text{ms}$ (OFF)
	Dynamic (reading only)	All variables, see table "List of the variables that can be displayed and connected to ..."	Operating mode	With digital output: real alarm; with RS485: virtual alarm.
	Static (writing only)	All the configuration parameters.	Alarm modes	Up alarm or down alarm
	Data format	1 start bit, 8 data bit, no parity, 1 stop bit	Controlled variables	W, V, A (see the table "List of the variables that can be displayed and connected to ...")
	Baud-rate	Selectable: 9600, 19200, 38400, 115200 bits/s	Set-point adjustment	Programmable on all the measuring range (see "VMU-E set of variables")
	Driver input capability	Parity: none	Hysteresis	Programmable on all the measuring range (see "VMU-E set of variables")
Digital output	Insulation	1/5 unit load. Maximum 160 transceivers on the same bus.	On-time delay	0 to 9999s (166min)
	Special functions	None	Off-time delay	0 to 9999s (166min)
	Insulation	See the table "Insulation between inputs and outputs"	Min. response time	$\leq 1\text{s}$, set-point on-time delay: "0 s"
Digital output	Number of outputs	1	Insulation	See the table "Insulation between inputs and outputs"
	Purpose	Selectable either for pulse transmission proportional to the energy being measured or for alarm control on selected variable.		

Main functions

Displaying	1 variable per page. See ("VMU-E set of variables")	Scaling of external shunt current input	Programmable from 0 to 120mV DC Programmable from 0 to 1000A DC
Password	Numeric code of max. 4 digits; 2 protection levels of the programming data: Password "0", no protection; Password from 1 to 9999, all data are protected	Input scale	
1st level 2nd level		Display scale	
Energy reset	By means of the front push-button		

Insulation between inputs and outputs

Module		VMU-E	VMU-X		
	Type of input/output	Measuring input	Power Supply	RS485 port	Static output
VMU-E	Measuring input	-	4kV	4kV	4kV
VMU-X	Power Supply	4kV	-	4kV	4kV
	RS485 port	4kV	4kV	-	4kV
	Static output	4kV	4kV	4kV	-

General specifications

Operating temperature	-25 to +55°C (-13°F to 131°F) (R.H. from 0 to 90% non-condensing @ 40°C)	Immunity to conducted disturbances	EN61000-4-6: 10V from 150KHz to 80MHz;
Storage temperature	-30 to +70°C (-22°F to 158°F) (R.H. < 90% non-condensing @ 40°C)	Surge	EN61000-4-5: 2kV on power supply; 4kV on current inputs.
Installation category	Cat. III (IEC 60664, EN60664)	EMC (Emission) Radio frequency suppression	According to EN61000-6-3 According to CISPR 22
Insulation (for 1 minute)	See table "Insulation between inputs and outputs"	Standard compliance Safety	IEC60664, IEC61010-1 EN60664, EN61010-1
Dielectric strength	4000 VAC RMS for 1 minute	Approvals	CE
Noise rejection CMRR	>65 dB, 45 to 65 Hz	Housing Dimensions (WxHxD) Material	17.5 x 90 x 67 mm Noryl, self-extinguishing: UL 94 V-0
EMC (Immunity) Electrostatic discharges	According to EN61000-6-2 EN61000-4-2: 8kV air discharge, 4kV contact;	Mounting	DIN-rail
Immunity to irradiated Electromagnetic fields	EN61000-4-3: 10V/m from 80 to 3000MHz; EN61000-4-4: 4kV on power lines, 2kV on single lines;	Protection degree Front Screw terminals	IP40 IP20
Immunity to Burst			

VMU-E connections

Connections Cable cross-section area Current, voltage	Screw-type Min. 2.5 mm ² , max 6 mm ² in case of flexible wire, Max. 10 mm ² in case of rigid wire. Min./Max. screws tightening torque: 0.5 Nm / 1.1 Nm Max 1.5 mm ² , Min./Max. screws tightening torque: 0.4 Nm / 0.8 Nm	Screw terminal purposes 6/10 mm ² 1.5 mm ²	4 screw terminals: 1 (+) for current input, 1 (+) for current output 2 (+) external shunt input 2 screw terminals: for negative connection
Current shunt		Weight	Approx. 100 g (packing included)

VMU-X connections

Connections Cable cross-section area	Screw-type 1.5 mm ² max. Min./Max. screws tightening torque: 0.4 Nm / 0.8 Nm		nals used for static output, 2 screw terminals used for power supply
Screw terminal purposes 1.5 mm ²	3 screw terminals used for RS485 port. 2 screw termi-	Weight	Approx. 100 g (packing included)

VMU-E power supply specifications

Power supply

Self-power supplied

through the VMU-X unit

VMU-X power supply specifications

Power supply

38 to 265 VAC/DC

Power consumption

1.5W, 3VA (VMU-X + VMU-E)

VMU-E set of variables

No.	Variables	Display read-out	Notes
1	V	0.0 to 999.9	
2	A	0.0 to 20.00	In case of external shunt input: 0.0 to 999.9
3	kW	0.0 to 99.99	In case of external shunt input: 0.0 to 999.9
4	kWh	0.0 to 99999.9	In case of external shunt input: 0.0 to 999999




List of the variables that can be displayed and connected to ...

- RS485 communication port
- Alarms


No	Variable	Display	RS485	Alarm	Reset	Notes
1	V	Yes	Yes	Yes	No	
2	V min	No	Yes	No	Yes	The value is saved into E ² PROM
3	V max	No	Yes	No	Yes	The value is saved into E ² PROM
4	A	Yes	Yes	Yes	No	
5	A min	No	Yes	No	Yes	The value is saved into E ² PROM
6	A max	No	Yes	No	Yes	The value is saved into E ² PROM
7	kW	Yes	Yes	Yes	No	
8	kW min	No	Yes	No	Yes	The value is saved into E ² PROM
9	kW max	No	Yes	No	Yes	The value is saved into E ² PROM
10	kWh	Yes	Yes	No	Yes	The value is saved into E ² PROM
11	Alarm	No	Yes	Yes	No	There is only one alarm which can be linked to the available instantaneous variables






VMU-E connections

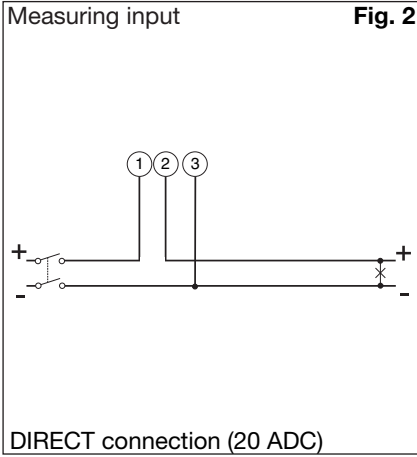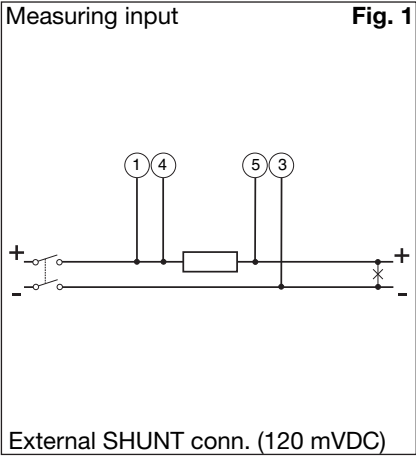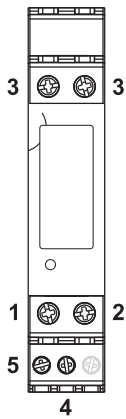


VMU-X connections

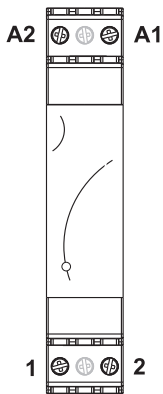


VMU-X D1

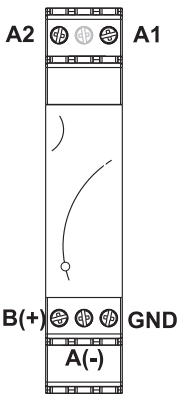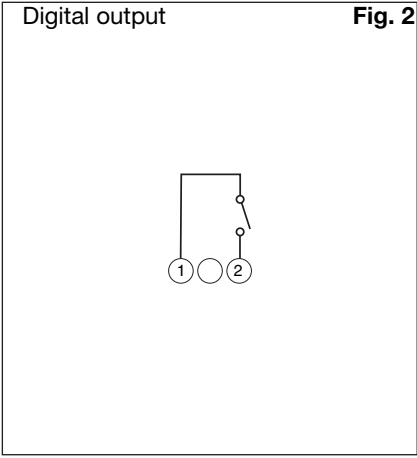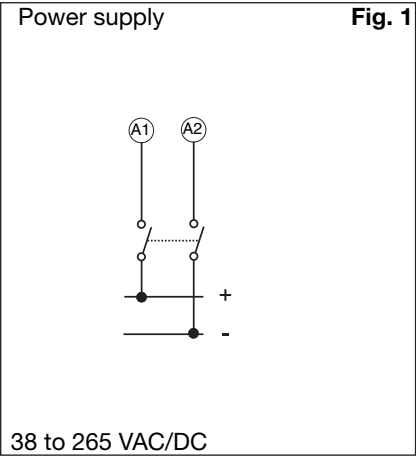

VMU-X S1

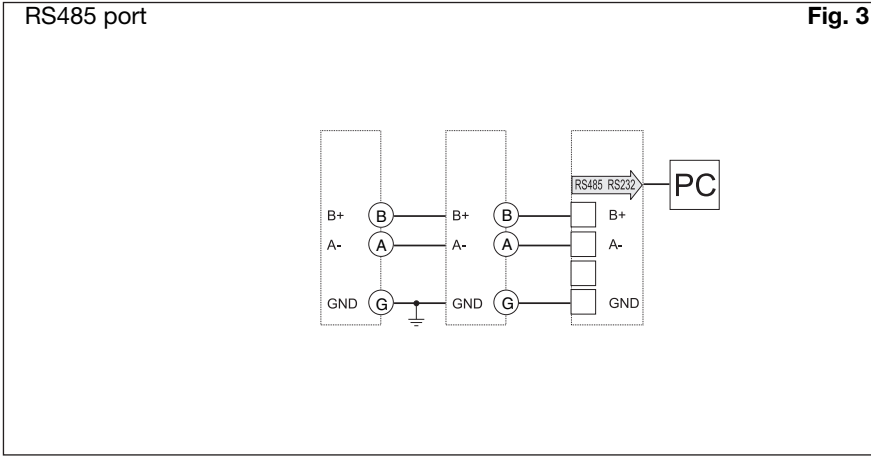

VMU-E Frontal panel description

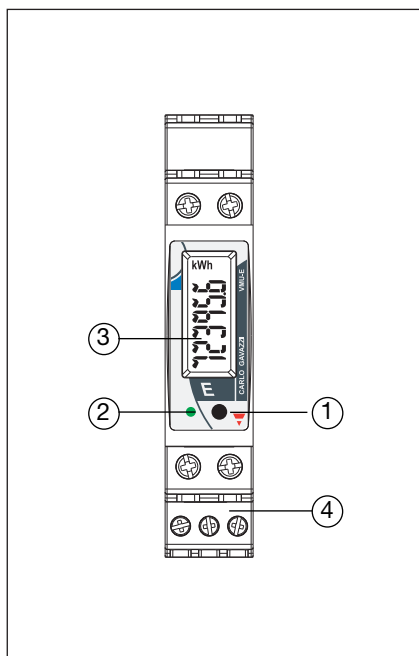

1. Push button.

To program the configuration parameters and to scroll the variables. One key function: short time pushbutton click: variable scroll or parameter increasing. Long time pushbutton click: programming procedure entering, parameter selection confirmation.

2. LED.

Red blinking light: energy consumption; 1000 pulses/kWh (Max Frequency 16 Hz). Red steady light: alarm detected (it has the priority on any other condition: energy consumption or communication). Green blinking light: the communication on the RS485 bus is working. Note: in case of energy counting or communication condition, the LED alternates its colour from red to green.

3. Display.


LCD-type with alphanumeric indications to:

- display the configuration parameters;
- display some measured variables.

4. Screw terminals.

For measuring input connections.

VMU-X Frontal panel description

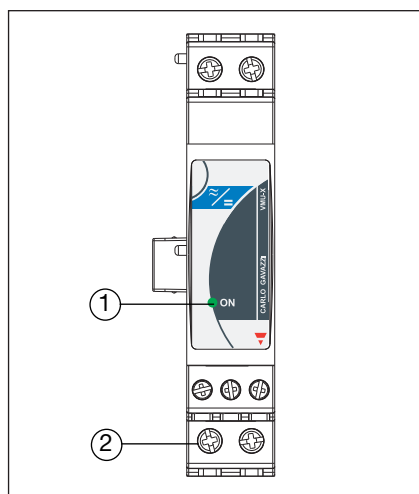

1. LED


Green: the power supply is ON.

2. Screw terminals

For power supply and either digital output or communication port connections.



VMU-E Dimensions and panel cut-out

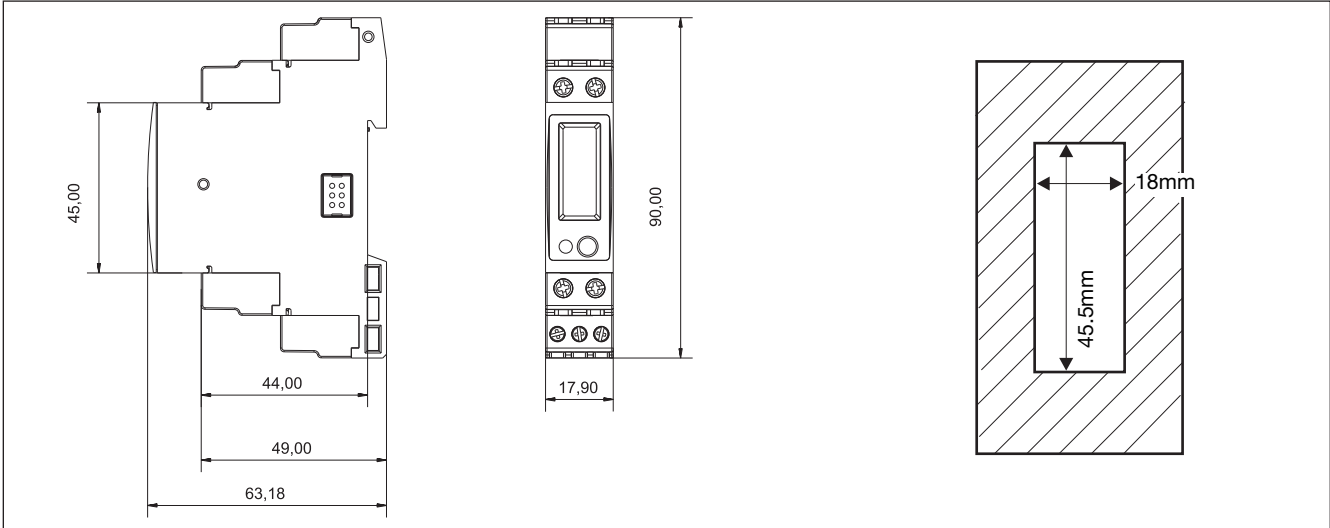

VMU-X Dimensions and panel cut-out

