


INSULATED CORD AND TERMINAL DIN NORM

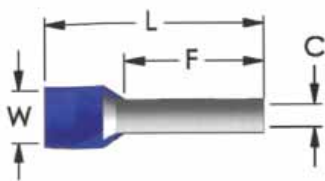


COLOUR CODES		
FRENCH	GERMAN	DIN

CODE	CABLE CROSS SECTION (mm ²)	F	L	C	W	PCS/BOX
ONKA - 8000	0.14	6.0	10.0	0.70	1.6	1.000
ONKA - 8001	0.14	8.0	12.0	0.70	1.6	1.000
ONKA - 8002	0.25	6.0	10.0	0.75	1.9	1.000
ONKA - 8003	0.25	8.0	12.0	0.75	1.9	1.000
ONKA - 8004	0.34	6.0	10.0	0.80	1.9	1.000
ONKA - 8005	0.34	8.0	12.0	0.80	1.9	1.000
ONKA - 8006	0.50	6.0	12.0	1.00	2.6	1.000
ONKA - 8007	0.50	8.0	14.0	1.00	2.6	1.000
ONKA - 8008	0.50	10.0	16.0	1.00	2.6	1.000
ONKA - 8009	0.75	6.0	12.0	1.20	2.8	1.000
ONKA - 8010	0.75	8.0	14.0	1.20	2.8	1.000
ONKA - 8011	0.75	10.0	16.0	1.20	2.8	1.000
ONKA - 8012	0.75	12.0	18.0	1.20	2.8	1.000
ONKA - 8013	1.00	6.0	12.0	1.40	3.0	1.000
ONKA - 8014	1.00	8.0	14.0	1.40	3.0	1.000
ONKA - 8015	1.00	10.0	16.0	1.40	3.0	1.000
ONKA - 8016	1.00	12.0	18.0	1.40	3.0	1.000
ONKA - 8017	1.50	8.0	14.0	1.70	3.5	500
ONKA - 8018	1.50	10.0	16.0	1.70	3.5	500
ONKA - 8019	1.50	12.0	18.0	1.70	3.5	500
ONKA - 8020	1.50	18.0	24.0	1.70	3.5	500
ONKA - 8021	2.50	8.0	14.0	2.20	4.2	500
ONKA - 8022	2.50	10.0	16.0	2.20	4.2	500
ONKA - 8023	2.50	12.0	18.0	2.20	4.2	500
ONKA - 8024	2.50	18.0	24.0	2.20	4.2	500
ONKA - 8025	4.00	10.0	17.0	2.80	4.8	200
ONKA - 8026	4.00	12.0	20.0	2.80	4.8	200
ONKA - 8027	4.00	18.0	26.0	2.80	4.8	200
ONKA - 8028	6.00	12.0	20.0	3.50	6.3	200
ONKA - 8029	6.00	18.0	26.0	3.50	6.3	200
ONKA - 8030	10	12.0	22.0	4.50	7.6	100
ONKA - 8031	10	18.0	28.0	4.50	7.6	100
ONKA - 8032	16	12.0	24.0	5.80	8.8	75
ONKA - 8033	16	18.0	28.0	5.80	8.8	75
ONKA - 8034	25	16.0	30.0	7.30	11.2	50
ONKA - 8156	25	18.0	32.0	7.30	11.2	50
ONKA - 8035	25	22.0	36.0	7.30	11.2	50
ONKA - 8036	35	16.0	30.0	8.30	12.7	25
ONKA - 8037	35	18.0	32.0	8.30	12.7	25
ONKA - 8038	35	25.0	39.0	8.30	12.7	25
ONKA - 8039	50	20.0	36.0	10.30	15.0	25
ONKA - 8040	50	25.0	40.0	10.30	15.0	25
ONKA - 8041	70	21.0	37.0	13.50	16.0	10
ONKA - 8042	95	25.0	44.0	14.70	18.0	10
ONKA - 8043	120	27.0	48.0	16.70	20.0	10
ONKA - 8044	150	32.0	58.0	19.50	23.0	10

DIN 46228 Standard,
Copper (Nickel plated),
Insulated with polyamide
Working temperature
-40 °C, +105 °C




INSULATED CORD AND TERMINAL DIN NORM

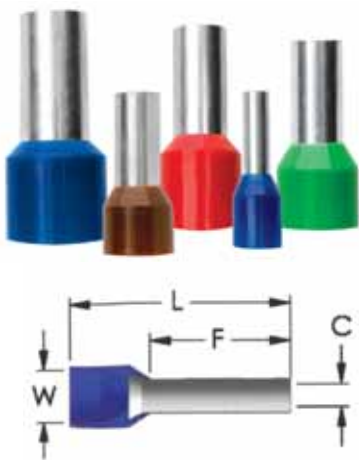


CODE	CROSS SECTION (mm²)	F	L	C	W	PCS/BOX
ONKA - 8007 - P	0.50	8.0	14.00	1.0	2.6	1 000
ONKA - 8010 - P	0.75	8.0	14.00	1.2	2.8	1 000
ONKA - 8014 - P	1.0	8.0	14.00	1.4	3.0	500
ONKA - 8017 - P	1.5	8.0	14.00	1.7	3.5	500
ONKA - 8021 - P	2.5	8.0	14.00	2.2	4.2	500
ONKA - 8025 - P	4.0	10.0	17.00	2.8	4.8	500
ONKA - 8028 - P	6.0	12.0	20.00	3.5	6.3	500
ONKA - 8030 - P	10	12.0	22.00	4.5	7.6	500
ONKA - 8032 - P	16	12.0	24.00	5.8	8.8	500
ONKA - 8034 - P	25	16.0	30.00	7.3	11.2	500
ONKA - 8036 - P	35	16.0	30.00	8.3	12.7	500
ONKA - 8039 - P	50	20.0	36.00	10.3	15.0	500

INSULATED TWIN CORD END TERMINAL DIN NORM 46228

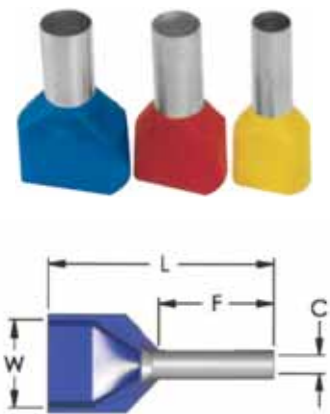


CODE	CROSS SECTION (mm²)	F	L	C	W	PCS/BOX
ONKA - 8161-P	2 x 0.50	8.0	15.0	1.5	2.5 / 4.7	500
ONKA - 8162-P	2 x 0.75	8.0	15.0	1.8	2.8 / 5.0	500
ONKA - 8164-P	2 x 1	8.0	15.0	2.05	3.4 / 5.4	500
ONKA - 8166-P	2 x 1.5	8.0	16.0	2.3	3.6 / 6.6	500
ONKA - 8168-P	2 x 2.5	10.0	18.5	2.8	4.2 / 7.8	500
ONKA - 8170-P	2 x 4	12.0	23.0	3.7	4.9 / 8.8	500
ONKA - 8171-P	2 x 6	14.0	26.0	4.8	6.9 / 10.0	500
ONKA - 8172-P	2 x 10	14.0	26.5	6.4	7.6 / 12.8	500
ONKA - 8173-P	2 x 16	14.0	31.5	8.3	9.6 / 18.6	500

NON-INSULATED CORD END TERMINAL DIN NORM 46228

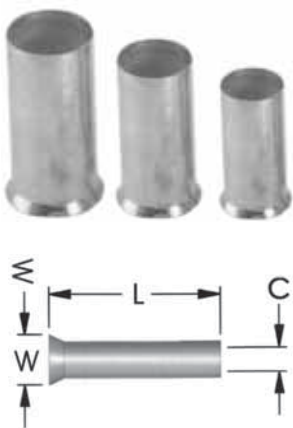

CODE	CROSS SECTION (mm²)	L	C	W	PCS/BOX
ONKA - 8102 - P	0.50	10.0	1.0	2.1	1.000
ONKA - 8105 - P	0.75	10.0	1.2	2.3	1.000
ONKA - 8108 - P	1	10.0	1.4	2.5	1.000
ONKA - 8112 - P	1.5	10.0	1.7	2.8	1.000
ONKA - 8117 - P	2.5	12.0	2.2	3.4	1.000
ONKA - 8121 - P	4	12.0	2.8	4.0	1.000
ONKA - 8125 - P	6	12.0	3.5	4.7	1.000
ONKA - 8128 - P	10	12.0	4.5	5.8	1.000
ONKA - 8131 - P	16	12.0	5.8	7.5	1.000

NON - INSULATED CORD AND TERMINALS DIN 46228

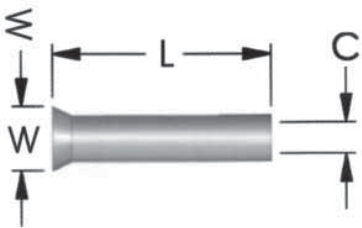


CODE	CABLE CROSS SECTION (mm ²)	L	C	W	PCS/BOX
ONKA - 8100	0.50	6.0	1.0	2.1	1.000
ONKA - 8101	0.50	8.0	1.0	2.1	1.000
ONKA - 8102	0.50	10.0	1.0	2.1	1.000
ONKA - 8103	0.75	6.0	1.2	2.3	1.000
ONKA - 8104	0.75	8.0	1.2	2.3	1.000
ONKA - 8105	0.75	10.0	1.2	2.3	1.000
ONKA - 8106	1.0	6.0	1.4	2.5	1.000
ONKA - 8107	1.0	8.0	1.4	2.5	1.000
ONKA - 8108	1.0	10.0	1.4	2.5	1.000
ONKA - 8109	1.0	12.0	1.4	2.5	1.000
ONKA - 8110	1.5	7.0	1.7	2.8	1.000
ONKA - 8111	1.5	8.0	1.7	2.8	1.000
ONKA - 8112	1.5	10.0	1.7	2.8	1.000
ONKA - 8113	1.5	12.0	1.7	2.8	1.000
ONKA - 8114	2.5	7.0	2.2	3.4	1.000
ONKA - 8115	2.5	8.0	2.2	3.4	1.000
ONKA - 8116	2.5	10.0	2.2	3.4	1.000
ONKA - 8117	2.5	12.0	2.2	3.4	1.000
ONKA - 8118	4.0	8.0	2.8	4.0	1000
ONKA - 8119	4.0	9.0	2.8	4.0	1000
ONKA - 8120	4.0	10.0	2.8	4.0	1000
ONKA - 8121	4.0	12.0	2.8	4.0	1000
ONKA - 8122	4.0	15.0	2.8	4.0	1000
ONKA - 8123	4.0	18.0	2.8	4.0	1000
ONKA - 8124	6.0	10.0	3.5	4.7	500
ONKA - 8125	6.0	12.0	3.5	4.7	500
ONKA - 8126	6.0	15.0	3.5	4.7	500
ONKA - 8127	6.0	18.0	3.5	4.7	500
ONKA - 8128	10.0	12.0	4.5	5.8	200
ONKA - 8129	10.0	15.0	4.5	5.8	200
ONKA - 8130	10.0	18.0	4.5	5.8	200
ONKA - 8131	16.0	12.0	5.8	7.5	100
ONKA - 8132	16.0	15.0	5.8	7.5	100
ONKA - 8133	16.0	18.0	5.8	7.5	100
ONKA - 8134	25.0	15.0	7.3	9.5	100
ONKA - 8135	25.0	16.0	7.3	9.5	100
ONKA - 8136	25.0	18.0	7.3	9.5	100
ONKA - 8137	25.0	22.0	7.3	9.5	100
ONKA - 8138	35.0	16.0	8.3	11.0	75
ONKA - 8139	35.0	18.0	8.3	11.0	75
ONKA - 8140	35.0	20.0	8.3	11.0	75
ONKA - 8141	35.0	25.0	8.3	11.0	75
ONKA - 8142	50.0	18.0	10.3	13.0	25
ONKA - 8143	50.0	20.0	10.3	13.0	25
ONKA - 8144	50.0	25.0	10.3	13.0	25
ONKA - 8145	70.0	22.0	13.5	15.3	10
ONKA - 8146	70.0	25.0	13.5	15.3	10
ONKA - 8147	70.0	32.0	13.5	15.3	10
ONKA - 8148	95.0	25.0	14.7	16.6	10
ONKA - 8149	95.0	32.0	14.7	16.6	10
ONKA - 8150	120.0	30.0	16.7	18.0	10
ONKA - 8151	120.0	32.0	16.7	18.0	10
ONKA - 8152	120.0	34.0	16.7	18.0	10
ONKA - 8153	150.0	32.0	19.5	21.5	10
ONKA - 8154	150.0	38.0	19.5	21.5	10

Made of copper (nickel plated) according to DIN 46228 standard



Made of copper (nickel plated)
According to DIN 46228
Standart insulated with polyamide,
working temperature
-40 °C - 105 °C

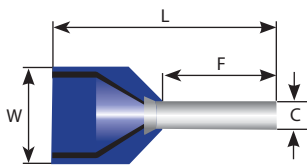

INSULATED TWIN CORD AND TERMINAL DIN NORM 46228

COLOUR CODES		
FRENCH	GERMAN	DIN

CODE	CABLE CROSS SECTION (mm ²)	F	L	C	W	PCS/BOX
ONKA - 8161	2 x 0.50	8.0	15.0	1.5	2.5 / 4.7	500
ONKA - 8162	2 x 0.75	8.0	15.0	1.8	2.8 / 5.0	500
ONKA - 8163	2 x 0.75	10.0	17.0	1.8	2.8 / 5.0	500
ONKA - 8164	2 x 1.0	8.0	15.0	2.05	3.4 / 5.4	500
ONKA - 8165	2 x 1.0	10.0	17.0	2.05	3.4 / 5.4	500
ONKA - 8166	2 x 1.5	8.0	16.0	2.3	3.6 / 6.6	500
ONKA - 8167	2 x 1.5	12.0	20.0	2.3	3.6 / 6.6	500
ONKA - 8168	2 x 2.5	10.0	18.5	2.8	4.2 / 7.8	250
ONKA - 8169	2 x 2.5	13.0	21.5	2.8	4.2 / 7.8	250
ONKA - 8170	2 x 4.0	12.0	23.0	3.7	4.9 / 8.8	100
ONKA - 8171	2 x 6.0	14.0	26.0	4.8	6.9 / 10.0	100
ONKA - 8172	2 x 10.0	14.0	26.5	6.4	7.6 / 12.8	50
ONKA - 8173	2 x 16.0	14.0	31.5	8.3	9.6 / 18.6	50